

## **A versatile Venetian blind that neatly integrates with all modern window systems including Tilt & Turn and glazed doors**

Intu has a modern, attractive, extruded, aluminium headrail profile and can be specified as either a Venetian or Pleated Blind, both fitting neatly inside the bead frame. The Venetian option offers a wide range of slat colours in 16 or 25mm slat widths. Similarly a wide range of colours and performance materials in 20mm pleats are possible. Pleated blinds are supplied fitted with UniPleat® that holds the fabric perfectly in shape.

The blind is held secure by tension cords that eliminate any 'rattle' against the glass and allow up to 15 degrees of tilt. Tilt operation on the Venetian can be either a slide control located on the headrail or grips positioned as desired at the side of the blind.

Raising / lowering of both venetian and pleated Intu blinds is extremely simple. Just lift / lower the bottomrail and the inbuilt friction will hold the blind in the chosen position Intu is particularly 'child safe' as it has no hanging cords.

Headrail End Caps attach to frame, enhanced appearance provided by covering Trim Caps

Headrail front sits almost flush with window, rail profile sits inside frame close to glass.

Attractive profile in extruded aluminium has excellent appearance - powder coated or silver anodised.


**Option 1**

Slide Control to adjust angle of slat (for blinds installed out of reach, slider can be operated using optional 0.6m rod fitted with Slide Control connector).

Choose 16 or 25mm slat width.

**Option 2**

Side Control for tilt angle; Pull down (c) to close slats Pull down (o) to open slats

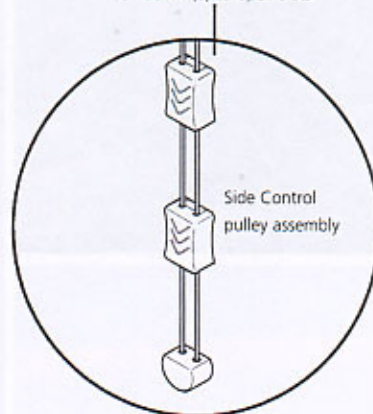

Adaptor available for use with wood frames.

Profiled Bottomrail eliminates undesired light gaps.

Bottomrail and Headrail available in selection of colours

Colour Coordinated End Caps enhance appearance while acting as tension cord guides.

Securing Grommets retain tension cord in window bead giving largest possible clear glass area when blind is raised.

**Sizes**

- Maximum Width: 1800mm
- Maximum Drop: 2500mm
- Minimum Width: 240mm
- Minimum Drop: 100mm
- Maximum total surface area: 2.5 square metres

**Installation**

- The blind Headrail is held in position using two screws at each side.
- 4mm spacers can be provided
- Tension Cords are secured into the window bottom bead
- Cord tension is set at installation

**Colour guide**

- Headrail, bottomrail & external components - white, silver and brown.
- Internal components - white
- Venetian slat - as per standard programme
- Cord and ladderstring - co-ordinating range

**Support materials**

- Demo kit without glass - MSM4230
- Product leaflet - MSM4234
- Multiproduct page - MSM4208
- Slat selector - MSV4233
- Retail brochure - MSM4207
- Fitting and operating instructions - MSV4235
- Trade Price List - Part code not applicable